



# Planigrout 300

**Three-component fluid epoxy mortar for high-precision anchorage work**

## WHERE TO USE

**Planigrout 300** is an epoxy mortar specifically developed for fixing structural elements, structural repairs and structural fillings which are also subject to stress due to dynamic loads.

### Some application examples

- Repair and structural reinforcement of beams and columns by casting into formworks.
- Rebuilding and renovation of crumbled joints in industrial floors.
- Repairing bridge-crane runways subject to strong vibrations.
- Repair of joints between concrete slabs in deteriorated industrial floors (butt joints).
- Filling of large holes in concrete floors and slabs.
- Foundations for presses and general heavy machinery.
- Evening-out of the surfaces of support elements for the bearing of bridge beams.
- Structural fixing of tie-rod fasteners and bolts in existing concrete structures, stone, rock and steel subject to vibration and chemical attack.

## TECHNICAL CHARACTERISTICS

**Planigrout 300** is a three-component product based on epoxy resin, selected well-graded aggregates and

special admixtures, blended according to a formula developed in MAPEI's own Research Laboratories. After mixing component A of **Planigrout 300** with its relative hardener (component B) and filler (component C), a fluid mixture which may be easily poured and applied in layers up to 5 cm is obtained.

After preparation, **Planigrout 300** hardens in approximately 8 hours at +23°C by means of chemical reticulation without shrinking, and is transformed into a compound with exceptional bonding strength and chemical and mechanical resistance characteristics.


After hardening **Planigrout 300** is durable and may be used for both internal and external applications.

**Planigrout 300** may be applied in a temperature range between +10°C and +35°C.

**Planitop 300** responds to the principles defined in EN 1504-9 ("*Products and systems for protecting and repairing concrete structures: definitions, requirements, quality control and conformity assessment. General principles for the use of products and systems*"), and the minimum requirements for EN 1504-6 ("*Anchoring of reinforcing steel bar*").

## RECOMMENDATIONS

- **Planigrout 300** must not be used for sealing flexible joints or joints which are subject to movement (use **Mapesil** or **Mapeflex** range products).
- **Planigrout 300** must not be used for cold joints

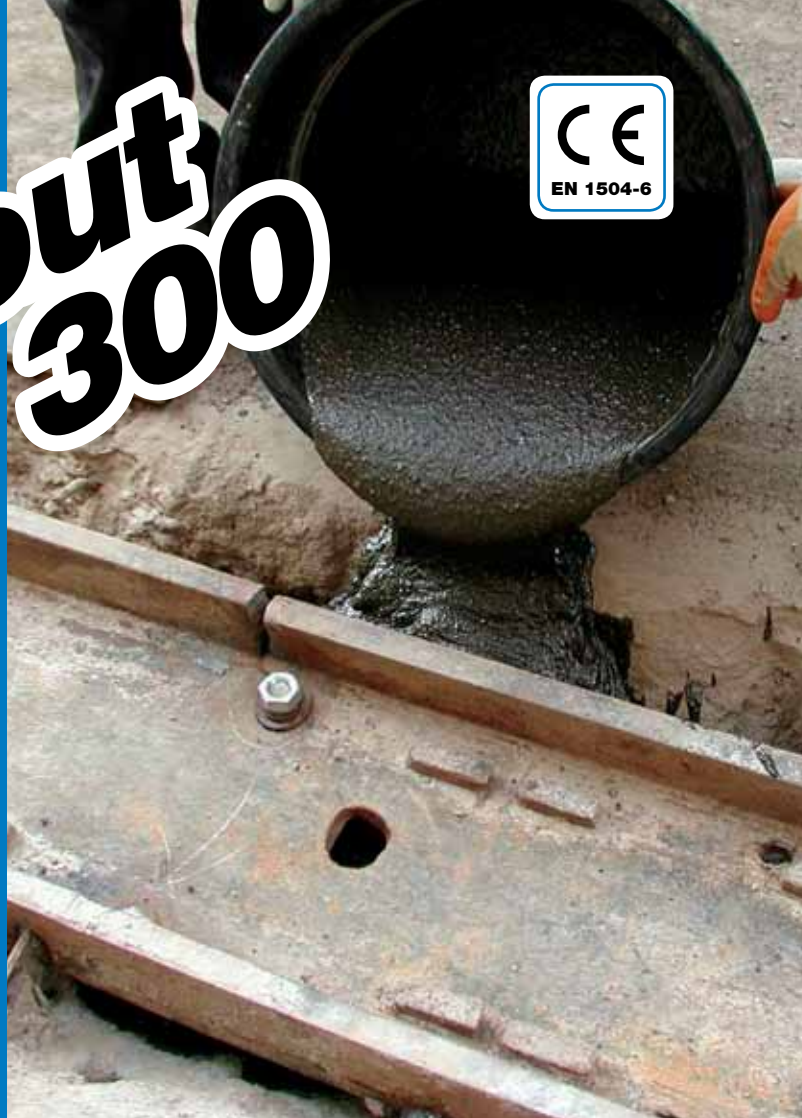

# Planigrout 300



between fresh and old concrete (use **Eporip**).

- **Planigrout 300** must not be used on wet surfaces.
- **Planigrout 300** must not be used on dirty or crumbly surfaces.
- **Planigrout 300** must not be used for bonding and grouting antiacid ceramic tiles (use **Kerapoxy**).

## APPLICATION PROCEDURE

### Preparation of the substrate

To guarantee that **Planigrout 300** bonds well to the substrate, special care must be taken in the preparation of the surfaces to be bonded.

The concrete, natural stone or brick substrate must be clean, dry and sound.

The most suitable methods for preparing the substrate are chiselling, sand-blasting, milling, shot blasting, grinding or sandpapering the surface in order to remove irregular or loose parts, efflorescence, cement laitance, traces of oil and form release agents.

Then remove all traces of dust from the substrate with compressed air and/or an industrial vacuum cleaner.

Metallic surfaces must be free of all traces of rust, paint and oil preferably by means of sandblasting down to bare metal (SA 2½). Structures made on-site in cast concrete, have to be cured for at least 4 weeks before applying **Planigrout 300** to avoid the stresses induced by hydrometric shrinkage in the concrete being concentrated at the interface of the joined parts.

### Preparing the mix

The three components which make up **Planigrout 300** have to be mixed together. Pour component B into component A, making sure that the container with the catalyst (component B) is completely emptied, and mix them together with a drill fitted with a low-speed mixer until a completely homogeneous paste is formed.

At this point, pour in the selected aggregates (component C) with a continuous, regular flow, and mix together for 4 or 5 minutes until a uniformly wet paste with a homogenous colour is obtained. The packages are already pre-dosed. Therefore, avoid using only partial quantities of the packages to avoid accidental errors in the mix ratio, which would lead to a lack or only partial setting of **Planigrout 300**. If the packages are to be partially used, a precision electronic scale is to be used.

### Application of the mix

**Planigrout 300** must be applied by pouring and, where necessary, into sealed formworks.

In order to achieve good bonding, it is advisable to pre-treat the surfaces to be repaired with **Primer MF**.

The air temperature has an effect on the setting time of the product; at +23°C, **Planigrout 300** may be worked for approximately 60 minutes.

**Planigrout 300** must be applied within the indicated pot life. Therefore, make sure that the work is organised and programmed so that all the operations are completed within the time indicated above.

## PRECAUTIONS TO BE TAKEN DURING AND AFTER APPLICATION

While taking into account the fact that the product sets in the time indicated above, no particular precautions need to be taken when the temperature is between +10°C and +35°C.

### Cleaning

**Planigrout 300** has a high bonding capacity even on metals, therefore it is advisable to wash all tools with a suitable solvent (ethyl alcohol, toluene, etc.) before the product completely sets.

### CONSUMPTION

2 kg/m<sup>2</sup> per mm of thickness.

### PACKAGING

Packages of 12.2 kg:  
component A = kg 1.6;  
component B = kg 0.6;  
component C = kg 10.

Packages of kg 36.6:  
component A = kg 4.8;  
component B = kg 1.8;  
component C = kg 30.

### STORAGE

12 months in a covered, dry area in its original packaging at a temperature of between +5°C and +30°C.

**Planigrout 300** component C complies with the conditions of Annex XVII to Regulation (EC) N° 1907/2006 (REACH), item 47.

## SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

**Planigrout 300** components A, B and C are irritating for the skin and eyes, and may cause sensitisation in those predisposed.

**Planigrout 300** component B is corrosive.

**Planigrout 300** component C contains cement that when in contact with sweat or other body fluids causes irritant alkaline reaction and allergic reactions to those predisposed.

When applying the product, we recommend using protective gloves and goggles and to take the usual precautions for handling chemical products.

In case of contact with eyes or skin wash immediately with plenty of water and seek medical attention.

**Planigrout 300** component A is also hazardous for aquatic life, do not dispose of the product in the environment.

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

## TECHNICAL DATA (typical values)

### PRODUCT IDENTITY

Type	PC		
	<b>Comp. A</b>	<b>Comp. B</b>	<b>Comp. C</b>
Consistency:	liquid	liquid	powder
Colour:	off-white	straw	grey
Maximum size of aggregate (mm):	2.0		
Density (g/cm <sup>3</sup> ):	1.09	1.04	–
Viscosity (mPa·s):	700	400	–

### APPLICATION DATA (at +23°C - 50% R.H.)

Mixing ratio:	A : B : C = 16 : 6 : 100
Colour of mix:	dark grey
Consistency of mix:	fluid
Density of the mix (kg/dm <sup>3</sup> ):	2.0
Brookfield Viscosity (mPa s):	35,000
Slump after mixing (EN 13395-2) (cm):	> 20
Application temperature range:	from +10°C to +35°C
Pot life of mix:	1 hour
Setting time:	6-8 hours
Final hardening time:	7 days

### FINAL PERFORMANCE

Performance characteristic	Test method	Requirements according to EN 1504-6	Performance of product
Creep: – movement with a load of 50 kN for 3 months - (mm):	EN 1544	≤ 0.6	0.3
Slip-resistance of reinforcement rods: – movement with a load of 75 kN - (mm):	EN 1881	≤ 0.6	< 0.45
Glass transition temperature:	EN 12614	≥ +45°C	+50°C
Compressive strength (MPa):	EN 12190	> 80% of value declared by manufacturer after 7 days	55 (after 1 day) 80 (after 3 days) 95 (after 7 days)
Flexural strength (MPa):	EN 196-1	not required	25 (after 1 day) 35 (after 3 days) 40 (after 7 days)
Compressive modulus of elasticity (MPa):	ASTM D695	not required	2,400
Modulus of flexural elasticity (MPa):	ISO 178	not required	10,000
Bond strength on concrete (substrate in MC 0.40 – water/cement ratio = 0.40) according to EN 1766 (MPa):	EN 1542	not required	> 3 (failure of concrete)
Reaction to fire:	EN 13501-1	Euroclass	D-s2, d2

# Planigrout 300



PRODUCT FOR PROFESSIONAL USE.

## WARNING

*Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible*

*for any consequences deriving from the use of the product.*

**Please refer to the current version of the Technical Data Sheet, available from our website [www.mapei.com](http://www.mapei.com)**

**All relevant references for the product are available upon request and from [www.mapei.com](http://www.mapei.com)**

(GB) / A.G. BETA

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution



**BUILDING THE FUTURE**

**369-6-2013**